


LED 高天井灯


- 軽量構造
- 高効率インバーター技術応用
- Safely Wire付き
- 施工、設置が簡単
- 工場及び倉庫などに



100/130/150/180W [LED High Bay Ceiling Light]

HC100UA-P2E39
 HC130UA-P2E39
 HC150UA-P2E39
 HC180UA-P2E39


外形図面



Beam Angle




Illumination

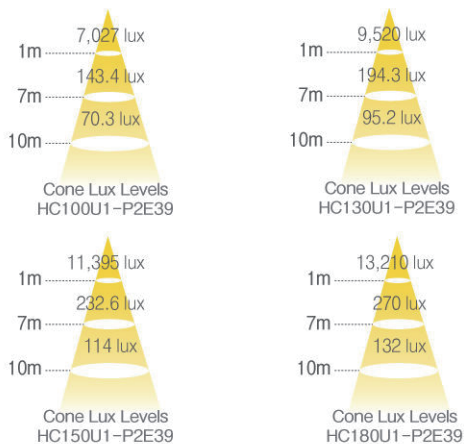


製品詳細SPEC



モデル名	HC100UA -P2E39	HC130UA -P2E39	HC150UA -P2E39	HC180UA -P2E39
大きさ(mm)	Ø261*242(H)			
重量(g)	1900 パワー除く			2100
口金	E39			
入力電圧(v)	AC 100~277			
消費電力(w)	100	130	150	180
全光束(Lumen)	9,000以上	11,700以上	13,500以上	16,200以上
光効率(Lm/W)	90以上			
色温度(K)	5,700			
照射角	70			
演色性(CRI)	65以上			
IP指数	-			
寿命(H)	50,000			
代替可能	MHL 150~250W			MHL 250~400W



Beam Angle




Illumination



100/130/150/180W [LED High Bay Ceiling Light]

HC100UA-P2NC1
HC130UA-P2NC1
HC150UA-P2NC1
HC180UA-P2NC1

外形図面



製品詳細SPEC

モデル名	HC100UA-P2NC1	HC130UA-P2NC1	HC150UA-P2NC1	HC180UA-P2NC1
大きさ(mm)	Ø261*227.5(H)			Ø261*239.5(H)
重量(g)	2400	2800		3400
口金				
入力電圧(v)	AC 100~277			
消費電力(w)	100	130	150	180
全光束(Lumen)	9,000以上	11,700以上	13,500以上	16,200以上
光効率(Lm/W)	90以上			
色温度(K)	5,700			
照射角	70			
演色性(CRI)	65以上			
IP指数	IP 64(Power 65)			
寿命(H)	50,000			
代替可能	MHL 150~250W			MHL 250~400W